ProPack
DICHTUNGEN UND PACKUNGEN AG

Weltweit Ihr
kompetenter Parnter in Sachen
Dichtungstechnik



PROTECT

Rigid eGraphite sandwich compound as base and cover ring for packing rings in a valve stuffing box

Characteristics

- Non-aging
- Stem-friendly
- Universally applicable for chemical use
- Prevents extrusion
- Prevents blowout
- Moisture-resistant

Operating range

p [bar]	-	-	1,500
v [m/s]	-	-	
t °C	-200 . . . +650		
pH	0 - 14		
g/cm³	-		

Temperature Applications in Steam
Pressure depends on the gap width to be bridged

Main application

- Valves and Fittings


Suitable for

- General industry
- Power plants

Form of delivery

- Endless packing ring
- Custom-made Please specify OD and ID

Cross section

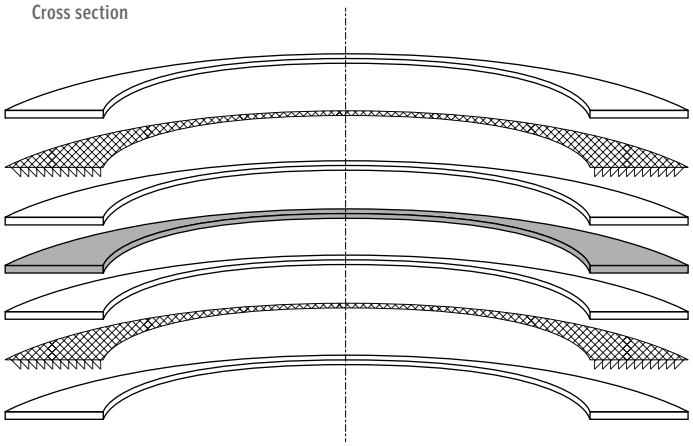



ProPack AG © 2026 | 03/26 | EN-03 | LN-PROTECT

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.
Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.
Please note that the technical values cannot be used all at the same time in their maximum values.

ProPack AG
Rudolf-Diesel-Ring 28 . 82054 Sauerlach
Fon ++49 (0) 8104 6640 0 . Fax ++49 (0) 8104 6640 44
propack@propack.ag

www.propack.ag
TECHNOLOGIE MADE IN GERMANY